

















KLONDIKE®




Independent Canadian Corporation

387 Oils and Lubricants
15 Million Litres in Stock throughout All 13 Provinces and Territories

Heavy Duty Engine Oils	6
Automotive Engine Oils	12
Gear Lubricants	16
Transmission Fluids	22
Hydraulic Fluids	28
Industrial & Functional Fluids	34
Greases	40
Biodegradable Lubricants	44



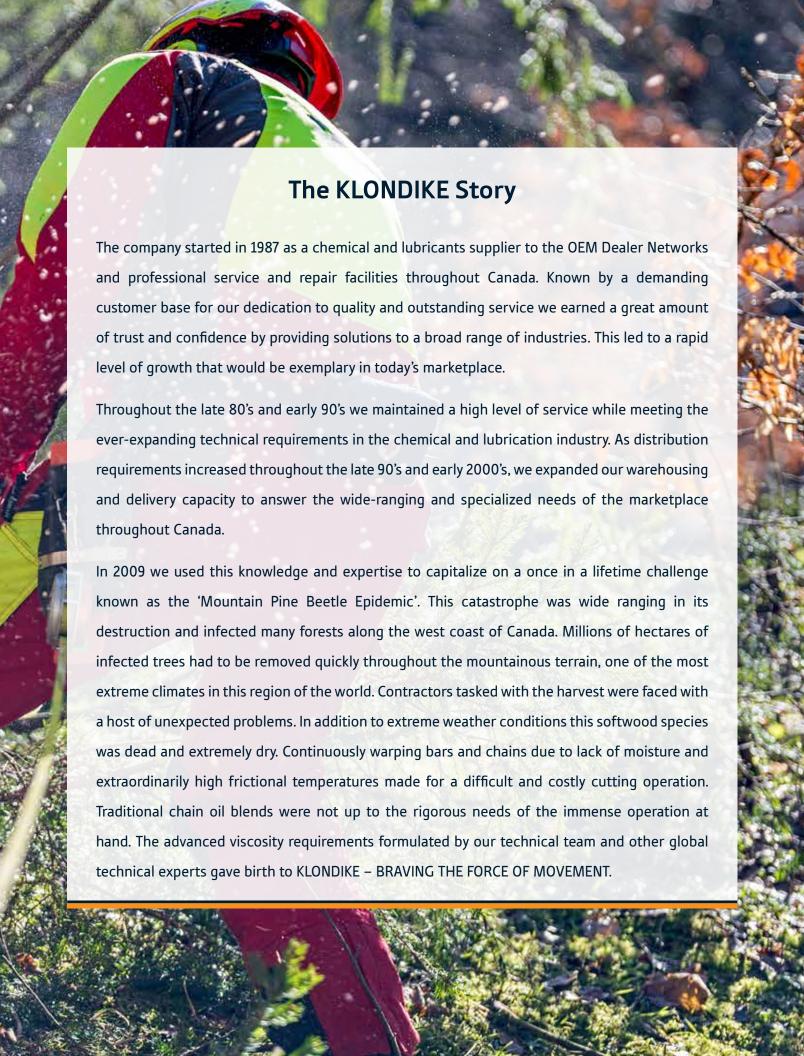

INTRODUCING KLONDIKE EUROPEAN FULL SYNTHETIC ENGINE OILS. MADE IN EUROPE.

Meet the high-performance KLONDIKE European Automotive Engine Oils, designed and made in Europe.

The KLONDIKE European formulated engine oils are high-tech, specialized, and modern full synthetic fluids that provide value through the following benefits:

- Extended engine life reduced friction for excellent protection against engine wear; outstanding engine cleanliness and exhaust system durability.
- **High viscosity index** highly resistant to viscosity shear loss and thermal breakdown from extended high temperature operation for long lubricant life.
- **Superior fuel economy –** high efficiency for superior fuel economy and emission reduction.



Formulated using a careful selection of high-performance synthetic base oils with premium additive chemistry, KLONDIKE's robust technology meets the demanding specifications and approvals of European OEMs, by resisting oxidation, oil thickening, and the formation of sludge inside the engine.

OEM APPROVED BY: *







Applications include modern European gasoline or diesel engines, with or without turbo-charging; including diesel engines with pump-injector-unit, TDI, or common rail designs. Provides reliable, long-term protection of diesel particulate filters, and other exhaust or emission after-treatment devices.







can save you space, time and money

KLONDIKE EZE-BOX is a 22 L oil box with an easy-to-pour valve. EZE-BOX bag-in-box oil dispensing system allows for maximum efficiency when used with EZE-RACK and EZE-JUG.

Effective, stackable and space-saving design

When used with EZE-RACK, you can store and use 8 EZE-BOXES taking only 26" by 30" floor space: boxes are positioned 2 per shelf for a total of 6 boxes ready for dispensing and 2 boxes on the bottom inventory shelf. EZE-BOX can also easily fit on a retail shelf or be stacked for easy transportation, storage and display.

Lero product contamination

The EZE-BOX valve allows for adjustable and easy oil flow. The flexible internal bladder allows for virtually all oil to dispense without letting any contaminants such as airborne dust and moisture to come in contact with the fluid.

Efficient and time-saving packaging

EZE-BOX makes an oil change faster and easier when compared to traditional quart bottles, thus saving valuable time for you and your customers. The cardboard box folds down completely for easy and quick recycling.



DISPENSING JUGS KL-EZEJUG

RACK KI -F7FRACK KLONDIKE heavy duty engine oils are formulated to assist in maximizing engine life and minimizing wear. Our advanced processes and technologies enable KLONDIKE heavy duty motor oils to strike a balance between durability, emission control, optimized drain intervals, and improved efficiencies for your equipment.

KLONDIKE API CK-4 heavy duty engine oils are a direct successor and replacement for API CJ-4 fluid technology. API CK-4 fluids are fully backwards compatible and supersede CJ-4 and previous service categories. KLONDIKE API CK-4 fluids offer improvements in fuel efficiency, oxidation resistance, viscosity shear stability, and aeration control over the previous fluid technologies. KLONDIKE heavy duty oils have been approved by world's leading manufacturers*, including:






















SAE 10W-30 CK-4 Synthetic Blend is OEM certified by Cummins, Detroit Diesel, Volvo, Mack,







KL-HD0380



KL-HD0382

diesel engines specifying API CK-4 Service Category and SAE 10W-40.





SAE 10W-40 CK-4 Synthetic Blend is recommended for use in naturally aspirated and turbocharged



Price:







KL-HD0490





Price:



and recommended for use in all engines specifying API CK-4 Service Category and SAE 15W-40.





KL-HD0560



KL-HD0575



KL-HD0580

Service Categories CK-4, CJ-4, CI-4 PLUS, CI-4, and SAE grade 0W-30.



KL-HD0582

SAE 0W-30 CK-4 Full Synthetic is recommended for use in heavy duty engines specifying API

SAE 15W-40 CK-4 is OEM certified by Cummins, Detroit Diesel, Volvo, Mack, Ford, and Renault;



KL-HD0590



KL-HD0595



KL-HD0599



Price:



KL-HD2060



KL-HD2080








KL-HD2095

KL-HD2099

Price:



SAE 0W-40 CK-4 Full Synthetic is recommended for use in heavy duty engines specifying API

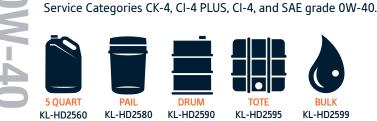









KL-HD2599

KL-HD2595

Price:

SAE 5W-40 CK-4 Full Synthetic is OEM certified by Detroit Diesel, Volvo, Mack, Ford, and Renault; and recommended for use in all engines specifying API CK-4 Service Category and SAE 5W-40.





KL-HD3060



KL-HD3080





KL-HD3082













Price:

SAE 15W-40 CK-4 Full Synthetic is recommended for use in heavy duty engines specifying API CK-4 Service Category and SAE 15W-40.







the use of FA-4 engine oils is specified.



KL-HD3590





KL-HD3595

KL-HD3599

SAE 10W-30 FA-4 Synthetic Blend is recommended for use in GHG-17 compliant engines where

Price:









KL-HD4290

KL-HD4295

Price:

Price:



SAE 10W CF Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel engines where SAE 10W monograde meeting API CF is specified.



KL-HD6080



KL-HD6090





KL-HD6095

KL-HD6099









KL-HD6360



KL-HD6380

engines where SAE 30 monograde meeting API CF-2 is specified.



KL-HD6390



SAE 30 CF-2 Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel



KL-HD6395

SAE 40 CF-2 Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel

KL-HD6399













SAE 50 CF-2 Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel

Price:





KL-HD6880





engines where SAE 50 monograde meeting API CF-2 is specified.

KL-HD6899

Price:



SAE 15W-40 Low Ash Natural Gas is recommended for use in heavy duty on-road turbo-charged or naturally aspirated engines running on natural gas and requiring low ash engine oil.



KL-HD7080



KL-HD7090



KL-HD7095



SAE 40

SAE 40 Low Ash Natural Gas is specifically designed for use in medium and high speed (rpm) engines fueled by pipeline natural gas.







KL-HD7499

Price:



SAE 40 Low Ash Sour Natural Gas is recommended for heavy duty stationary turbo-charged or naturally aspirated, stoichiometric or lean burn engines running on landfill or organic/bio gas and requiring low ash engine oil.

SAE 40 Mid Ash Sour Natural Gas is recommended for use in medium and high speed (rpm)

gas engines fueled by processed or pipeline natural gas or other gas sources that may contain









Price:

KL-HD7680 KL-HD7690

corrosive materials.

KL-HD7695

KL-HD7699



KL-HD7890





KL-HD7899

Price:

SAE 20W-40 Railroad Engine Oil is an advanced ashless formulation for large diesel engines in railroad, marine, and power generation applications. Designed for use in heavy duty diesel engines specifying SAE 20W-40 multigrade zinc-free engine oil.

SAE 40 Railroad Engine Oil is an advanced ashless formulation for large diesel engines in railroad, marine, and power generation applications. Designed for use in heavy duty diesel engines







KL-HD8290

KL-HD8295 KL-HD8299





Price:

specifying SAE 40 monograde zinc-free engine oil.





KL-HD8490

KL-HD8495

KL-HD8499

AUTOMOTIVE ENGINE OILS

GEAR LUBRICANTS

TRANSMISSION FLUIDS

HYDRAULIC FLUIDS

INDUSTRIAL OILS

GREASES

KLONDIKE advanced technology automotive engine oils are formulated for optimum efficiency and are designed for use in modern, highly fuel efficient engines that are subject to increasing levels of stress such as stop-and-go city driving, frequent short trips, extreme high and low operating temperatures, extended idling and towing. KLONDIKE synthetic blend and full synthetic motor oils for passenger cars offer superior oxidation stability, extra protection against heavy load conditions, additional high temperature protection, and better cold weather properties than conventional motor oils. Additionally, KLONDIKE premium quality automotive engine oils are formulated under the newest technology and are certified under the latest ILSAC GF-5 and API SN PLUS specifications. This technology is also good for use in the prior ILSAC GF-4 or API SM specifications.










Automotive Engine Oils









SAE 10W-40 SN PLUS uses a specialized formula for older, high mileage engines. Recommended for use in passenger cars, light trucks, sport utility vehicles, and other stationary or mobile engines.







Price:







Price:



SAE 5W-20 SN PLUS/GF-5 Synthetic Blend is recommended for use in automobiles and other stationary or mobile engines specifying SAE 5W-20 grade and API SN PLUS/GF-5 Service Category.

SAE 20W-50 SN PLUS uses a specialized formula for older, high mileage engines. Recommended for use in passenger cars, light trucks, sport utility vehicles, and other stationary or mobile engines.





KL-LD1040



KL-LD1060



KL-LD1080



KL-LD1082







KL-LD1090 KL-LD1095

KL-LD1099

Price:



OUART KL-LD1240

5 QUART

KL-LD1260





SAE 5W-30 SN PLUS/GF-5 Synthetic Blend is recommended for use in automobiles and other stationary or mobile engines specifying SAE 5W-30 grade and API SN PLUS/GF-5 Service Category.



KL-LD1282

DRUM KL-LD1290 KL-LD1295

KL-LD1299

Price:

Automotive Engine Oils









KL-LD1480





KL-LD1482



KL-LD1490

SAE 10W-30 SN PLUS/GF-5 Synthetic Blend is recommended for use in automobiles and other stationary or mobile engines specifying SAE 10W-30 grade and API SN PLUS/GF-5 Service Category.



KL-LD1495



Price:

SAE OW-16 SN PLUS Full Synthetic is a highly advanced, 100% synthetic engine oil formulation engineered to provide exceptional resistance and recommended for use in stationary or mobile engine specifying SAE 0W-16 grade and API SN PLUS/GF-5.





Price:



SAE 0W-20 SN PLUS/GF-5 dexos1° Full Synthetic is GM dexos1° certified and recommended for use in stationary or mobile engine specifying SAE 0W-20 grade and API SN PLUS/GF-5.













KL-LD3090



KL-LD3095

KL-LD3099

Price:















specifying SAE 5W-20 grade and API SN PLUS/GF-5.

EZE-BOX KL-LD3282



DRUM KL-LD3290



SAE 5W-20 SN PLUS/GF-5 Full Synthetic is recommended for use in stationary or mobile engine

KL-LD3295



KL-LD3299

Price:

SAE 5W-30 SN PLUS/GF-5 dexos1° Full Synthetic is GM dexos1° certified and recommended for use in stationary or mobile engine specifying SAE 5W-30 grade and API SN PLUS/GF-5.







KL-LD3460



KL-LD3482





KL-LD3490



KL-LD3495





Automotive Engine Oils



Price:

engines. Specially formulated to exceed demanding OEM requirements for fuel economy, while offering high stability and very long service interval.















LOW SAPS







KL-LD4640



5 L BOTTLE KL-LD4660



while offering high stability and very long service interval.

DRUM KL-LD4690



KL-LD4695



SAE 5W-30 Euro Low SAPS Full Synthetic is recommended for use in European gasoline and diesel fueled engines. Specially formulated to exceed demanding OEM requirements for fuel economy,

SAE 0W-20 Euro Full Synthetic is recommended for use in European gasoline and diesel fueled

KL-LD4699

SAE 5W-30 Euro Mid SAPS Full Synthetic is an extended service life, premium engine oil with specialty base oils and additives. Designed for use in European gasoline and diesel fueled engines.











EURO



KL-LD4840

5 L BOTTLE KL-LD4860





KL-LD4890

















SAE 5W-40 SN/CF Euro Full Synthetic is recommended for use in modern European 4, 6 and 8+ cylinder multi-cam, multi-valve, naturally aspirated, super- and turbo-charged engines.



EZE-BOX KL-LD5082



Price:



SAE 5W-40 Euro Mid SAPS Full Synthetic is a very high-performance engine oil that resists oxidation, sludge deposits, and viscosity loss. Designed for use in European gasoline and diesel fueled engines.



1 L BOTTLE

KL-LD5240



KL-LD5260



KL-LD5290





KL-LD5295















Tough operating conditions are no match for KLONDIKE **gear** oils. They are specially formulated for maximum protection, durability, and efficiency no matter what climate or conditions are prevalent. Only the finest technology available is used in manufacturing our premium synthetic gear lubricants. KLONDIKE robust formulations are designed for gears and differentials that place rigorous demands on fluid technology and require extreme temperature and pressure protection. Driveline components in today's automotive and heavy duty vehicles have become increasingly stressed by increased engine output, higher operating temperatures, and extended service intervals. KLONDIKE's advanced gear oil technology protects against severe wear while balancing fluid durability in heavy load conditions, including extended drain intervals when applicable.

= Conventional



= Synthetic Blend



= Full Synthetic

Gear Lubricants

















SAE 85W-140 GL-5 is designed for differentials, manual transmissions, power take off units, and



KL-GL1095



Price:

PAIL KL-GL1380



KL-GL1390



final drives specifying SAE 85W-140 and API GL-5/MT-1.



Price:

SAE 75W-90 GL-5 Full Synthetic is recommended for use in heavy duty gear applications specifying SAE 75W-90 and API GL-5/MT-1 including limited slip.















KL-GL2085



KL-GL2090





KL-GL2095 KL-GL2099

Price:

SAE 75W-140 GL-5 Full Synthetic is recommended for use in heavy duty gear applications specifying SAE 75W-140 and API GL-5/MT-1 including limited slip.















KL-GL2495

KL-GL2499

Gear Lubricants







drives of all sizes where ISO 68 is specified.



ISO 68 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on

KL-GL3690 KL-GL3680

KL-GL3695

KL-GL3699

Price:

ISO 100 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 100 is specified.



DRUM



KL-GL3880 KL-GL3890

KL-GL3895

KL-GL3899

Price:

ISO 150 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 150 is specified.











KL-GL4080

KL-GL4090

KL-GL4095

KL-GL4099

Price:



ISO 220 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 220 is specified.

ISO 320 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on













KL-GL4280

KL-GL4290

KL-GL4295

KL-GL4299

Price:

drives of all sizes where ISO 320 is specified.







PAIL **DRUM** KL-GL4490 KL-GL4480

KL-GL4495 KL-GL4499

Price:

Gear Lubricants



drives of all sizes where ISO 460 is specified. KL-GL4680



KL-GL4690





Price:



ISO 150 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 150 is specified.

ISO 460 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on











KL-GL6080

KL-GL6090

KL-GL6095 KL-GL6099

Price:



ISO 220 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 220 is specified.





KL-GL6280



KL-GL6290



KL-GL6295

KL-GL6299

Price:

ISO 320 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 320 is specified.

ISO 460 EP Full Synthetic is formulated for industrial bearings and gear applications operating in













KL-GL6480

KL-GL6490

KL-GL6495

KL-GL6499

Price:











KL-GL6680

KL-GL6690

KL-GL6695 KL-GL6699

Price:

Gear Lubricants















KL-GL6899

ISO 680 EP Full Synthetic is formulated for industrial bearings and gear applications operating in

KL-GL6880 KL-GL6890 KL-GL6895 KLONDIKE transmission fluids are formulated for use in a full range of automatic transmissions and provide premium shifting characteristics. This extensive line of automatic transmission fluids offers smooth yet responsive shifting, long service life, and outstanding fuel efficiency. KLONDIKE transmission oils are engineered to provide improved performance, extended transmission life, as well as premium flow characteristics at very low temperatures and protection against oxidation, varnish and sludge at high temperatures.

= Conventional



= Synthetic Blend



= Full Synthetic

Transmission Fluids



TYPE-F Automatic Transmission Fluid is a non-friction modified fluid designed for use in older Ford vehicles, and other import brands, where such a fluid is specified.



KL-TF0880





KL-TF0895

Price:















KL-TF1099

DEXRON®-VI / MERCON® LV ATF Full Synthetic is OEM certified by General Motors and Ford.



Price:









Approvals:



MERCON® LV



Price:

Heavy Duty ATF Full Synthetic is formulated for high performance and long service life in heavy duty automatic transmissions in urban and rural commercial vehicles.











KL-TF3160 KL-TF3180 KL-TF3190

KL-TF3195

KL-TF3199





ATF Universal Full Synthetic is one highly advanced and truly universal automatic transmission fluid ideal for global application. Meets the performance requirements of (but not limited to):

- ATF Type A-Suffix A
- Aisin Warner AW-1, JWS 3309, 3314, 3317, 3324, SCS, M315 A-1, T-IV
- Acura ATF-Z1 (VTM-4)
- Allison C-3, C-4, TES-389
- American Motors ATF+3(MS7176-E), ATF+4(MS9602)
- Audi ZF 5HP (18FL, 19FL, 24A, 30), 6HP (1375.4), TL52162 (LT71141), G-052-025-A2, G-052-162-A1/A2, G-052-182-A2, G-052-990-A2
- BMW ZF 5HP (18FL, 19FL, 24A, 30), 6HP (1375.4), LA2634, ETL-7045E, ETL-8072B, N402, LT71141 83.22.9.400 (272, 275), 83.22.9.407 (738, 765, 807, 858, 859), 83.22.0.397 (114), 83.22.0.403 (248, 249)
- Caterpillar Power Shift TO-2
- Chrysler AS68RC "T-IV", AS69RC, ATF+3 (MS7176-E), ATF+4 (MS9602), ZF 8HP, ZF 9HP
- Daewoo LT 71141
- Fiat "all vehicles", Type T-IV
- Ford Mercon®
 - > Mercon (XT-2-QDR,XT-2-QSM syn)
 - > Mercon V (XT-5-QM, XT-5-DM, WSS-M2C-202B)
 - > Mercon SP (XT-6-QSP, XT-6-DSP, WSS-M2C-919D

except 6HP26 / 6R60 / 6R75 transmissions

- > Mercon LV (XT-10-QLV, WSS-M2C-938A)
- > WSS-M2C33-A/B/C/D/F/G, WSS-M2C138-CJ, WSSM2C166-H, 185-A, 195-A, 202-B, WSS-M2C 922-A1, 924-A (XT-8-QAW)
- GM Dexron[®]
 - > Dexron VI, III-H, III-G, II-E, II

 - > GM Transfer Fluid 12378515 (Transynd® applications)
 - > GM Transfer Case 12378396, 12378508 (Auto Trak II)
- Honda ATF-Z1, VTM-4, DW-1, DPF
- Hyundai SP-II, SP-III, SP-IV, SP-4M, WS-9638
- Infiniti Matic-D, Matic-J, Matic-K, Matic-S
- IDEMITSU K17, JATCO 3100 PL085
- Isuzu Besco ATF-II, ATF-III
- Jaquar ZF 5HP24, ZF 6HP26, LT71141, JLM20238, JLM21044, ATF 3403 M115, M1375.4
- JASO M315-2004 1A, 2A
- Jeep ATF+3, ATF+4, AS68RC (T-IV)
- Kia SP-II, SP-III, SP-IV, SP-4M, ATF Red 1

- Lexus Type T, T-II, T-III, T-IV, WS (JWS 3324)
- MAN 339 A,F, V1, V2, Z1, Z2, Z3
- Mazda ATF-M III, ATF M-3, ATF-MV, V (XT-9-QMM5, FNR 5), FZ
- MERCEDES ZF 4HP20, 223.2, 236.1, 236.10, 236.11, 236.12(NAG 1/2), 236.14, 236.41, 236.5(C-4), 236.6, 236.7, 236.8, 236.9, 722.3, 722.4, 722.5, 722.6, 722.9
- Mini Cooper T-IV, 83 22 0 402 413, 83 22 7 542
- Mitsubishi Diamond SP-II, SP III, SP IV, Dia Queen J2, J3
- Nissan Matic-D, Matic-J, Matic-K, Matic-S, 402
- Porsche ZF 5HP19FL, ZF 5HP20, LT71141, ATF 3403-M115, T-VI, JWS 3309
- Renault "all vehicles"
- RENK DOROMAT
- SAAB JWS 3309, 93 165 146/147
- SATURN T-IV, GM TASA, T-IV ATF, GM WS ATF
- Shell 3403, 3353, LA2634, ATF-134, M-1375.4, M-1375.5, M-1375.6, M-12108
- Subaru ATF, AT-HP
- **Suzuki** ATF 2326, 2384K, JWS 3309, 3314
- Texaco ETL-7045E, ETL-8072B, N402
- Toyota Type T, T-II, T-III, T-IV, Type D-2, WS (JWS) 3324), Toyota Prius (WS)
- VICKERS M-2950-S, I-286-S
- **VOITH** G607 (55.6335.XX), G1363 (55.66336.XX), TURBO, ZF, ECOMAT, ZF TE-ML 02F, 03D, 04D, 05L, 09, 11B, 14A/B/C, 16L, 17C
- Volvo 97340, 97341, 97342 (AT-102), 1161640, 1161540, 1161521, T-IV
- Volkswagen ZF 5HP (18FL, 19FL, 24A, 30), 6HP (1375.4), TL 52162 (LT71141), TL 52533, G-055-025-A2, G-052 162-A1/A2, G-052-182-A2, G-052-990-A2, G-052-025-A2, G-055-540-A2
- ZF 8HP, 9HP



5 OUART

KL-TF3060





KL-TF3082







DRUM KL-TF3090

KL-TF3095

KL-TF3099

Price:



CVT Fluid Full Synthetic is formulated for belt and chain driven continuously variable transmissions. Do not use as a replacement for ATF.

- Audi/VW (TL 52180; G 052 180; G 052 516)
- BMW 8322 0 136 376/8322 0 429 154 (EZL799/799A)
- Daihatsu Amix CVTF-DC, CVTF-DFE
- Dodge / Jeep (NS-2 / CVTF+4/Mopar CVT 4)
- Ford CFT30/WSS-M2C933-A /Motorcraft XT-7-QCFT
- GM/Saturn (DEX-CVT, CVTF I-Green2)
- Honda (HMMF, HCF-2)
- Hyundai/Kia CVTF (SP-CVT-J1)
- Mazda CVTF 3320
- Mercedes Benz CVT28, 236.20
- Mini Cooper (EZL 799/ EZL 799A/ZF CVT V1)
- Mitsubishi DiaQueen (CVTF-J1, CVTF-J4)
- Nissan (NS-1, NS-2, NS-3)
- Punch EZL 799/EZL 799A
- Renault ELFMATIC
- Shell Green 1V
- Subaru (NS-2 / Lineartronic CVTF, i-CVTF, K0425Y0710) e-CVTF, High Torque
- Suzuki (TC / NS-2 / CVTF Green 1, Green 2, CVTF 3320)
- Toyota (CVTF TC, CVTF FE)





KL-TF3399

KL-TF3340

KL-TF3390

Price:

SAE 40 Full Synthetic ES Transmission Lubricant is recommended for use in on-highway heavy duty trucks and buses as well as off-highway heavy equipment in the forestry, construction and mining industries.

PAIL

DRUM





KL-TF3990 KL-TF3980

KL-TF3995

KL-TF3999

Price:



Price:

SAE 50 Manual Transmission Full Synthetic is recommended for use in all applications specifying SAE grade 50 and API Service Category MT-1. KL-TF4080



KL-TF4085



KL-TF4090



KL-TF4095



KL-TF4099

SAE 10W TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and



stationary equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 10W grade are specified. KL-TF6080 KL-TF6090







Price:

SAE 30 TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and stationary equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 30 grade are specified.











KL-TF6295

KL-TF6299

equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 50 grade are specified.













KL-TF6480 KL-TF6490

KL-TF6495

KL-TF6499

All Season Synthetic Blend TDTO-4 is for all season use across a wide T° range in heavy duty mobile and stationary equipment where Caterpillar TO-4, TO-4M, or Allison C-4 fluids are specified.

SAE 50 TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and stationary











Price:











KL-TF7490





Arctic Full Synthetic TDTO-4 with Arctic Performance Technology is designed for ultra-low T°

KL-TF7495

KL-TF7499

KLONDIKE anti-wear hydraulic fluids are designed to operate in the most extreme conditions. Today, operating conditions require greater precision and pressure than ever before. While advanced systems do more work and are more responsive, they are also more vulnerable to wear and deposit formation when operated at higher temperatures and pressures. Highly tested KLONDIKE hydraulic lubricants are specially formulated with the finest base oils and additive systems that deliver unrivaled performance and protection.

= Conventional



= Synthetic Blend



= Full Synthetic

Hydraulic Fluids











duty and industrial service where ISO 22 viscosity is specified.



Price:


Red AW 22 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service specifying ISO 22 viscosity. Dyed in red for better visibility.

AW 22 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy











Price:

KL-HF1199

AW 32 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 32 viscosity is specified.









KL-HF1260



KL-HF1275



KL-HF1280



KL-HF1290



KL-HF1295

KL-HF1299

Price:

Red AW 32 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service specifying ISO 32 viscosity. Dyed in red for better visibility.





Price:



KL-HF1390





KL-HF1395 KL-HF1399



AW 46 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 46 viscosity is specified.











Price:

AW 68 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 68 viscosity is specified.



KL-HF1680









KL-HF1695

KL-HF1699



AW 100 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 100 viscosity is specified.







DRUM KL-HF1890

KL-HF1899

Price:



Multi-Viscosity AW 15 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment operating in ultra-low temperatures.

Multi-Viscosity AW 22 with Arctic Performance Technology is formulated for high performance

hydraulic systems in mobile and stationary equipment across a broad temperature range.



KL-HF4880



KL-HF4890





KL-HF4895

KL-HF4899





KL-HF5080



KL-HF5090





KL-HF5095

KL-HF5099

Price:

30

Multi-Viscosity AW 36 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment across a broad temperature range.







Price:

KL-HF5280

KL-HF5295

KL-HF5290

KL-HF5299

Multi-Viscosity AW 46 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment across a broad temperature range.













KL-HF5480

KL-HF5495 KL-HF5490

KL-HF5499

Price:



Long Life Turbine Oil ISO 32 is designed for use in non-geared steam, hydro-electric and gas turbines as well as a high temperature bearing lubricant and coolant.











KL-HF6680

DRUM KL-HF6690

KL-HF6695

KL-HF6699

Price:

Long Life Turbine Oil ISO 46 is designed for use in non-geared steam, hydro-electric and gas turbines as well as a high temperature bearing lubricant and coolant.













KL-HF6880

KL-HF6890

KL-HF6895

KL-HF6899

Price:

Long Life Turbine Oil ISO 68 is designed for use in non-geared steam, hydro-electric and gas turbines as well as a high temperature bearing lubricant and coolant.







KL-HF7090



KL-HF7095



KL-HF7099

KL-HF7080 Price:







KL-HF7490





turbines as well as a high temperature bearing lubricant and coolant.

Price:

Universal Tractor Fluid is the one single fluid that may be used to lubricate all conventional points on an agricultural or industrial tractor or piece of mobile equipment with a common sump.

Long Life Turbine Oil ISO 150 is designed for use in non-geared steam, hydro-electric and gas

















5 QUART

KL-HF7480

KL-HF8060

KL-HF8075

KL-HF8080

KL-HF8090

KL-HF8095

KL-HF8099

Price:

Arctic Tractor Fluid Synthetic Blend is designed to fulfill the torque transfer, hydraulic, and power transmission requirements of farm tractors and other mobile off-road equipment.













KL-HF8180

KL-HF8195

KL-HF8199

Price:

Universal Tractor Fluid Full Synthetic is formulated with Arctic Performance Technology for use in all kinds of farm equipment, off-highway machinery, and industrial tractors.









KL-HF8280

Price:

Universal Red Tractor Fluid is a specialized, advanced formulation designed to fulfill the torque transfer, hydraulic, and power transmission requirements of modern agricultural and other mobile off-road equipment.





KL-HF8480



KL-HF8490



KL-HF8495



Price:

*WET BRAKE

VET BR.

Wet Brake Lubricant Full Synthetic is a specialized heavy duty fluid designed to fulfil VOLVO wet brake WB101 and WB102.





KL-HF8680

0 KL-HF8690

Price:

CIRCULATING 220

ISO 220 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.



KL-HF9280

Price:

CIRCULATING 460

ISO 460 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.



KL-HF9495

Price:

The KLONDIKE family of industrial and functional fluids is formulated for exceptional performance and reliability using world-class technologies that have been trusted and proven by industry professionals for many years and is relied on by industry users all year round. Our bar and chain oil is of the highest quality and operates in extreme climatic - high or low temperature - conditions. It offers unsurpassed durability and performance for equipment operating in high heat conditions, and performs flawlessly in the logging and saw mill industries that require the most robust and durable lubricant formulations in order to maximize efficiency and productivity.

= Conventional





= Full Synthetic

Industrial Oils



Bar & Chain Oil is designed for the lubrication of chains, bars, and sprockets of chain saws.



KL-100650

Price:

Light Hi-Tack Bar & Chain Oil is a low viscosity formula for winter use in all types of chain saws with manual or automatic oilers for lubrication of the bar, chain, and sprocket.

Hi-Tack Bar & Chain Oil is a medium viscosity formula for all-season use in all types of chain saws













DRUM KL-I01090

KL-IO1095



Price:









PAIL KL-I01260 KL-I01280

DRUM KL-I01290

KL-I01295



Price:

KL-I01460

Hi-Tack Bar & Chain Oil is formulated for all season use in chain saws, open bearings, gears, and chains found in industrial applications or anywhere a tacky oil is required.



KL-I01480





DRUM KL-I01490

KL-IO1495





KL-102290





KL-102299

Price:

ISO 68

Rock Drill Oil ISO 68 is formulated for the internal mechanisms and moving parts of pneumatic drilling equipment operating in heavy duty service environments where ISO 68 is specified.

Rock Drill Oil ISO 100 is formulated for the internal mechanisms and moving parts of pneumatic

Rock Drill Oil ISO 32 is formulated for the internal mechanisms and moving parts of pneumatic drilling equipment operating in heavy duty service environments where ISO 32 is specified.





KL-102280







KL-102680 KL-I02690

KL-102695

KL-102699

Price:







KL-I02899

KL-102880 KL-I02890

KL-I02895

Price:

Rock Drill Oil ISO 150 is formulated for the internal mechanisms and moving parts of pneumatic drilling equipment operating in heavy duty service environments where ISO 150 is specified.

Rock Drill Oil ISO 220 is formulated for the internal mechanisms and moving parts of pneumatic











PAIL KL-103080

DRUM KL-103090

KL-103095

KL-103099

Price:



Price:

drilling equipment operating in heavy duty service environments where ISO 220 is specified.



PAIL DRUM KL-103280 KL-I03290

KL-I03295

KL-103299

36



duty pipeline compressors pumping hydrocarbons such as natural gas.

DRUM KL-104490

KL-I04495

Price:

















BULK

Non-Detergent 30 Lubricating Oil is recommended for use in air compressors and other industrial

ISO 260 Natural Gas Compressor Oil is specifically designed for the lubrication of large, heavy

KL-105895

KL-105899

Price:

Universal 2-Cycle is a premium low ash formula that promotes internal engine cleanliness and prolongs spark plug life in outdoor power equipment such as chain saws, trimmers, blowers and other machinery.









236 mL BOTTLE 473 mL BOTTLE KL-106029

KL-I06032

Price:



TC-W3 2-Cycle is a NMMA certified, virtually ashless engine oil formulated for use in high performance engines using pre-mix or mix-on-demand VRO oil delivery system applications requiring oil meeting API TC and/or JASO FB.











QUART

KL-106040

5 QUART KL-106060

DRUM KL-106090

Price:



2-Cycle Full Synthetic Snowmobile Engine Oil is a premium lubricant formulated for use in modern snowmobiles (Arctic-Cat, Polaris, Yamaha, Ski-Doo), motorcycles, scooters, ATV's, and other powersport engines.






KL-106240 Price:

5 QUART KL-106260





ISO 68 Way Oil is specifically formulated for use in the lubrication of bearings, slides, and ways of

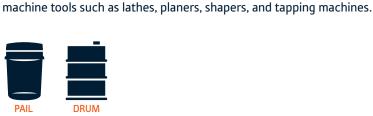

KL-I07290

KL-107280 Price:

Soluble Cutting Oil is a water-soluble cutting fluid designed for long service life and low maintenance; and suitable for use on a wide range of materials and machining operations.

Tacky Saw Guide Oil ISO 100 is recommended for all types of thin kerf saw blades on modern gang











PAIL KL-107880

KL-I07890

KL-107895

KL-107899

Price:

ISO 100

saws and edgers. DRUM

Price:

ISO 150

Tacky Saw Guide Oil ISO 150 is recommended for all types of thin kerf saw blades on modern gang saws and edgers.

KL-I08390

KL-108590

Price:

Enhanced Form Oil is a clear, non-staining fluid designed for the easy release of concrete forms. Price:

Specially formulated for ease of use with all types of form materials.

KL-109790





KL-IO9795

KL-I09799

38











KL-109995

KL-109999

form release as well as other similar commercial applications.

Dust Suppressant/Form Oil is colorless, odorless, neutral oil for dust suppression and concrete



KLONDIKE produces a range of unique robust and tacky **greases** that provide premium lubrication in difficult operating conditions and are tailored to industry requirements for improved productivity. They are specially engineered for environments with extreme temperature requirement, moisture and dirt contamination, heavy loads, extended maintenance intervals and other conditions that impact performance. Our greases are created with the finest base oils and additives in order to provide outstanding tackiness, lubrication and protection. These formulations will guard against oxidation and wear in extreme pressure and high temperature applications.

Greases

= Conventional



reduction in equipment downtime.

= Synthetic Blend



= Full Synthetic









nKL-GR1630 nKL-GR1680 nKL-GR1685







TUBE KL-GR0430







Price:

Ultra Tac EP-00 Synthetic Blend is recommended for pressurized auto grease systems, industrial bearings operating at high speed, and where ultra-low To limits the mobility of heavier grease.

Multipurpose Red Grease is recommended for greasing applications of plain bearings, rolling

KLONDIKE nano Full Synthetic EP-1.5 Grease is formulated for use in the most technical and demanding industrial, automotive, and heavy duty equipment applications. Supports a 45%









KL-GR0880

KL-GR0885 KL-GR0890

Price:



Price:

Syn Tac EP-00 Synthetic Grease is an extreme pressure, multi-purpose, semi-fluid lithium complex formulation fortified with PAO synthetic base oil, polymers, anti-wear agents, tackiness additives, and rust and oxidation inhibitors.



KL-GR0985

Greases













Ultra Tac EP-0 Synthetic Blend is designed for heavy duty use in industrial, on- and off-road vehicle, and heavy equipment applications operating in extreme cold To where NLGI 0 is specified.

Ultra Tac EP-1 Synthetic Blend is designed for heavy duty use in industrial, on- and off-road

Syn Tac EP-1 Synthetic Grease is an extreme pressure, multi-purpose, semi-fluid lithium complex formulation fortified with PAO synthetic base oil, polymers, anti-wear agents, tackiness additives,

Price:





KL-GR1430

KL-GR1030



KL-GR1080





KL-GR1490

NLGI GC-LB

Price:





and rust and oxidation inhibitors.

KEG KL-GR1585

Price:





KL-GR1830



KL-GR1848



KL-GR1880



KL-GR1885



Ultra Tac EP-2 is designed for extreme duty use in a wide variety of industrial, on- and off-road vehicle, and heavy equipment applications where NLGI 2 is specified. NLGI GC-LB certified.

DRUM KL-GR1890

NATIONAL LUBRICANT GREASE INSTITUTE NLG GC-LB

Price:



Moly Tac Arctic HD Synthetic Blend Grease is designed for high lubricating performance in extremely cold environments.





Price:



MOLY

Moly Tac EP-1 is formulated with 3% molybdenum disulfide for use in heavy duty, shock loaded bearings and bushings in industrial or off-highway equipment where NLGI 1 is required.





KL-GR2430



KL-GR2485

Price:

Moly Tac EP-2 is formulated with 3% molybdenum disulfide for use in heavy duty, shock loaded

MOLY



LB certified.

KL-GR2830







NATIONAL LUBRICANT GREASE INSTITUTE NLGI GC-LB

Greases

Price:



Moly Tac Bentone High Temp EP-2 is recommended for use in kiln car wheel bearings, furnace door bearings, heat exchange motor bearings, oven conveyors and other application where extremely high temperatures are encountered.

bearings and bushings in industrial or off-highway equipment where NLGI 2 is required. NLGI GC-



KL-GR8890

Price:

Open Gear Grease is engineered to protect extremely heavy loaded, slow moving, large open gear sets operating in severely challenging environments.







PAIL KL-GR9080

KL-GR9085

Price:



Open Gear Lubricant is specially formulated to protect heavily loaded, slow moving, large open gear sets when used with spray type application system.





Price:



KL-GR9280

KL-GR9285

43



The KLONDIKE family of biodegradable lubricants are designed as an environmentally safer alternative to traditional industrial lubricants. With the rise in natural resource based industries being encouraged to monitor the impact and sustainability of the work completed in environmentally sensitive areas, the need for more environmentally safe and efficient products has increased. Our line of biodegradable lubricants are formulated using non-toxic chemistry with no heavy metals to contaminate water or soil, which will greatly reduce the immediate and longterm impact of the fluids on the environment in the event of an oil leak or spill. The KLONDIKE line of biodegradable lubricants are highly stable for smooth operational efficiency, and highly resistant to oxidation and deposit formation for long service life, while providing a high level of environmental conservation and protection.





= Synthetic Blend



Biodegradable Lubricants

= Full Synthetic







KL-BL0180

Price:

ENVIRO AW 32 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 32 viscosity is specified.

ENVIRO AW 22 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston,

or qear-type hydraulic pumps in heavy duty and industrial service where ISO 22 viscosity is specified.





KL-BL0190



PAIL

KL-BL0280 KL-BL0290

KL-BL0295



ENVIRO AW 46 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or qear-type hydraulic pumps in heavy duty and industrial service where ISO 46 viscosity is specified.

ENVIRO AW 68 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 68 viscosity is specified.









Price:

KL-BL0380

PAIL DRUM KL-BL0390 KL-BL0395







KL-BL0480

DRUM KL-BL0490

KL-BL0495

Price:

Biodegradable Lubricants

friendly, long life hydraulic fluid designed for high performance applications in mobile and stationary equipment where ISO 32 viscosity is specified.





KL-BL1080

KL-BL1090

KL-BL1095

Price:

ENVIRO MV 46 Anti-Wear Hydraulic Fluid is a zinc free, inherently biodegradable, environmentally friendly, long life hydraulic fluid designed for high performance applications in mobile and stationary equipment where ISO 46 viscosity is specified.

ENVIRO MV 32 Anti-Wear Hydraulic Fluid is a zinc free, inherently biodegradable, environmentally







KL-BL1180 KL-BL1190

KL-BL1195

Price:

BIO AW 32 Readily Biodegradable Hydraulic Fluid is a non-toxic, ashless fluid designed for high performance hydraulic systems in mobile and stationary equipment where ISO 32 viscosity is specified.








KL-BL1880

KL-BL1890

KL-BL1895



BIO AW 46 Synthetic Blend Hydraulic Fluid is a readily biodegradable, non-toxic, high performance







KL-BL1980

KL-BL1990

KL-BL1995

Price:



hydraulic oil designed for maximum performance and system protection in industrial and mobile hydraulic equipment.





DRUM KL-BL2780

KL-B2790

KL-BL2795

Price:

Biodegradable Lubricants

BIO Rock Drill Oil ISO 100 is a readily biodegradable, extreme pressure lubricant designed for the performance and protection of heavy duty pneumatic tools such as rock drills, breakers,

jackhammers, and drifters as well as other surface and down-hole equipment.









DRUM KL-BL4390 KL-BL4380

KL-BL4395

Price:

BIO Rock Drill Oil ISO 150 is a readily biodegradable, extreme pressure lubricant designed for the performance and protection of heavy duty pneumatic tools such as rock drills, breakers,






KL-BL4480

KL-BL4490 KL-BL4495

Price:

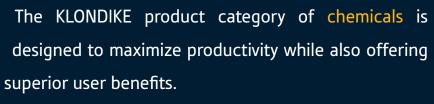

KLONDIKE Rust Blast is a professional strength, fast acting, penetrating lubricant. Powerful penetrating action blasts through rust and corrosion to loosen and lubricate stuck parts.

KLONDIKE Grease Blast is a truly versatile and certified biodegradable all-in-one degreaser. Simply alter the dilutions and it becomes a muscled water based engine degreaser, white wall tire cleaner, vinyl top cleaner, leather, plastic and vinyl cleaner, and a concrete floor degreaser.

KLONDIKE Brake Blast is an advanced formulation of highly technical solvents that once applied will quickly dissolve and remove grease, oil, brake fluid, road grime, and dirt. This non-chlorinated, low odor formula dries fast, leaves no residue, and is safe for use on most materials including plastics.

Chemicals

49

AEROSOL

KL-CH4030

Price:

Grease Blast is a versatile, non-flammable, power-packed, highly effective degreaser for professional use. Certified biodegradable.

Rust Blast is a professional strength, fast acting, penetrating lubricant. Powerful penetrating





KL-CH6530



KL-CH6550 KL-CH6580





KL-CH6590

action blasts through rust and corrosion to loosen and lubricate stuck parts.

Price:

Brake Blast is a non-chlorinated solvent designed to remove contaminants from brake parts quickly and easily. Surfaces dry residue free for improved, smooth brake performance.









KL-CH8630 KL-CH8680

KL-CH8690

Warranty

KLONDIKE Lubricants Corporation Warranty

KLONDIKE Lubricants Corporation warrants that at the time of sale, all lubricant, grease, and engine coolant products bearing the KLONDIKE brand meet their written product specifications and are free of defective materials, design, and workmanship.

The KLONDIKE warranty is in addition to, and does not invalidate, any warranty supplied by an original equipment manufacturer when used in accordance with the KLONDIKE written product recommendations and the original equipment manufacturers' written specifications**.

KLONDIKE is 100% committed to our customers. To support this commitment, KLONDIKE Lubricants Corporation will repair or replace equipment parts that have been damaged as a direct result of the failure of any of our products**.

**For specific warranty details and procedures, contact KLONDIKE Lubricants Corporation at info@klondikelubricants.com.

^{*} TRADEMARKS DISCLAIMER: All OEM product names and trademarks are the property of their respective owners, which are in no way associated or affiliated with KLONDIKE Lubricants Corporation.

Comparison Chart

KLONDIKE Cross-Reference Table

KLONDIKE®	Shell	Chevron	Petro Canada	Esso/ Mobil	Conoco-Phillips	Castrol	Total
AW Hydraulic Fluid	TELLUS S2 M	RANDO HD	HYDREX AW	NUTO H, DTE 20	HYDRAULIC AW, POWERFLOW AW, MEGAFLOW AW	HYSPIN AWS, PARADENE AW	TOTAL AW, AZOLLA ZS
Multi-Viscosity Hydraulic Fluid	TELLUS S2 V	RANDO HDX	HYDREX MV	UNIVIS HVI	POWERFLOW HE	HYSPIN HVI, DUAL RANGE HV	HYDRAGRI, EQUIVIS ZS
15W-40 CK-4 Engine Oil	ROTELLA T4	DELO 400 SDE	DURON HP, SHP	DELVAC SUPER, DELVAC ELITE	GUARDOL ECT, FLEET SUPREME EC	VECTON, CRB MULTI	RUBIA OPTIMA
0W-30/0W- 40/5W-40 CK-4 Full Synthetic Oil	ROTELLA T6	DELO 400 SYNTHETIC LE	DURON UHP	DELVAC 1 ESP	TRITON ECT, TRITON ARCTIC	N/A	RUBIA OPTIMA 1500
80W-90 GL-5 Gear Oil	SPIRAX S4	DELO GEAR, DELO GEAR ESI	TRAXON	MOBILUBE HD, ESSO GEAR GX	MP GEAR LUBE	AP GEAR OIL	DYNATRANS HD
75W-90/75W-140 Full Synthetic Gear Oils	SPIRAX S6 AXME	DELO GEAR HD, XDM	TRAXON -E SYNTHETIC	DELVAC 1 SYNTHETIC GEAR	SYNGEAR SS, SYNGEAR FE, SYNGEAR LDO	SYNGEAR	XRD FE, SYN NA
Universal Tractor Fluid	SPIRAX S4 TXM	TRACTOR FLUID 1000 THF	DURATRAN	HYDRAUL 56, MOBIL 424	POWERTRAN, POWERTRAN XP	UTF	DYNATRANS MP
TO-4 Drivetrain	SPIRAX S4 CX	DELO TORQFORCE	PRODURO	MOBILTRANS HD	POWERDRIVE FLUID	TRANS-C	DYNATRANS AC
EP-0, EP-1 & EP-2 Grease	GADUS S2 V220, S3 V220	ULTRA DUTY EP, ULTI PLEX EP, DELO GREASE	PRECISION, VULTREX	DELVAC XTREME, MOBILUX, UNIREX	MULTIPLEX, DYNALIFE	PYROPLEX BLUE, PYROPLOEX RED	MULTIS EP
Bar & Chain Oil ISO 90/150/220	CHAIN OIL	RED CHAIN BAR OIL	DURATAC	HD CHAIN OIL	SPECIAL BAR AND CHAIN	N/A	BAR & CHAIN
ENVIRO AW	TELLUS S3 M	CLARITY AW	ENVIRON AW	N/A	POWERFLOW NZ	HYSPIN ZZ	AZOLLA AF
ENVIRO MV	N/A	N/A	ENVIRON MV	DTE 10 EXCEL	POWERFLOW NZ HE	N/A	N/A
BIO AW 32, 46	N/A	N/A	N/A	N/A	N/A	BIO HE AW	N/A
BIO Rock Drill 100, 150	N/A	N/A	N/A	N/A	N/A	ECOTERRA ROCK DRILL	N/A

Industry Applications



AGRICULTURE

KLONDIKE agriculture fluids are formulated to ensure maximum productivity in a critically time sensitive seasonal industry. Proper lubrication goes beyond protection, and our lubricants are created with premium base oils and inhibitors to disperse soot and reduce sludge. The KLONDIKE engine oils provide durability and reliability, and consistent performance during the long, demanding hours of the harvest season.



AUTOMOTIVE

The KLONDIKE product lines of automotive engine oils and automatic transmission fluids employ advanced formulations to meet and exceed the world's leading automakers requirements. Our cutting-edge synthetic blend and full synthetic formulas are engineered to provide maximum protection and optimum performance in all driving conditions. Certified by GM's dexos1°, GM's DEXRON°-VI, Ford's MERCON° LV.



CONSTRUCTION & EXPLORATION

Understanding the rigorous challenges and the nohassle requirements placed on construction and exploration equipment, KLONDIKE has engineered robust lubricants for environments with moisture and dirt contamination, heavy loads, extended maintenance intervals and other harsh conditions. The KLONDIKE Arctic Performance Technology line ensures maximum protection with smooth and reliable performance in extreme cold weather conditions.



FORESTRY

With relentless work schedules, environmental challenges, competitive pricing and harsh climatic conditions faced by the forestry industry, we are continually enhancing the KLONDIKE range of oils and lubricants to ensure harvesting, transportation and wood-production is as efficient and cost effective as possible. Our line of tough greases is blended for maximum lubrication and adhesion with minimum flyoff, making them ideal for milling operations.

Industry Applications



INDUSTRIAL

KLONDIKE has a vast range of premium industrial lubricants from conventional hydraulic fluids through to premium environmentally friendly oils. We provide solutions that increase uptime, productivity, and efficiency. The KLONDIKE lubricants can be utilized to extend maintenance intervals and prolong the life of your equipment. Our technical professionals will identify your needs and provide solutions for faster production and greater cost efficiency.



MARINE

The KLONDIKE range of high quality marine oils is tailored for reliability, stringent safety standards and strict environmental requirements as specified by marine authorities. Engineered for durability and maximum protection, whether it is salt or fresh water, these hardworking lubricants will ensure that your marine vessels or pleasure craft run smoothly and efficiently. Certified by the National Marine Manufacturers Association - NMMA®.



MINING

We offer a complete selection of oils and lubricants tailored to the requirements of all types of mining operations from equipment to process lubrication. The KLONDIKE line of heavy duty engine oils will deliver optimum efficiency and performance to every application and specification found in the wide range of machinery used in mining. From surface to underground mining our oils and greases are formulated to deliver outstanding equipment protection.



ON-ROAD HEAVY DUTY

Our heavy duty engine oils are formulated to protect your investment in your equipment and maximize the life of your engine. KLONDIKE heavy duty engine oils provide high performance in extreme temperatures, heavy-load requirements and challenging terrain. They are designed to meet the difficult challenge of effectively balancing durability, extended drain intervals, and emission control. Certified by Cummins, Detroit Diesel, Volvo, Mack, Ford and Renault.

KLONDIKE Distribution Facilities

Dedicated to meeting the delivery needs of our customers, we have warehousing and distribution centres that are strategically located throughout Canada to cater to the time-sensitive nature of your industry.

BRITISH COLUMBIA

Serving BC

101-1005 Derwent Way 3078-275th Street
Delta, BC V3M 5R4 Langley, BC V4W 3L4

ALBERTA

Serving Northern BC, AB, SK, YT and NT 12810-170 Street NW Edmonton, AB T5V 0A6

MANITOBA

Serving MB, Northwestern ON and NU 1510 Wall Street NW

Winnipeg, MB R3G 2T3

ONTARIO

Serving ON and QC

1615 Clark Blvd Brampton, ON L6<u>T 4W1</u>

NEW BRUNSWICK

Serving the Atlantic Provinces

350 English Dr Moncton, NB E1E 3Y9



Winter 2019-2020

KLONDIKE Lubricants Corporation

1-877-293-4691 • info@klondikelubricants.com • www.klondikelubricants.com

